


Mechanical Dimensions

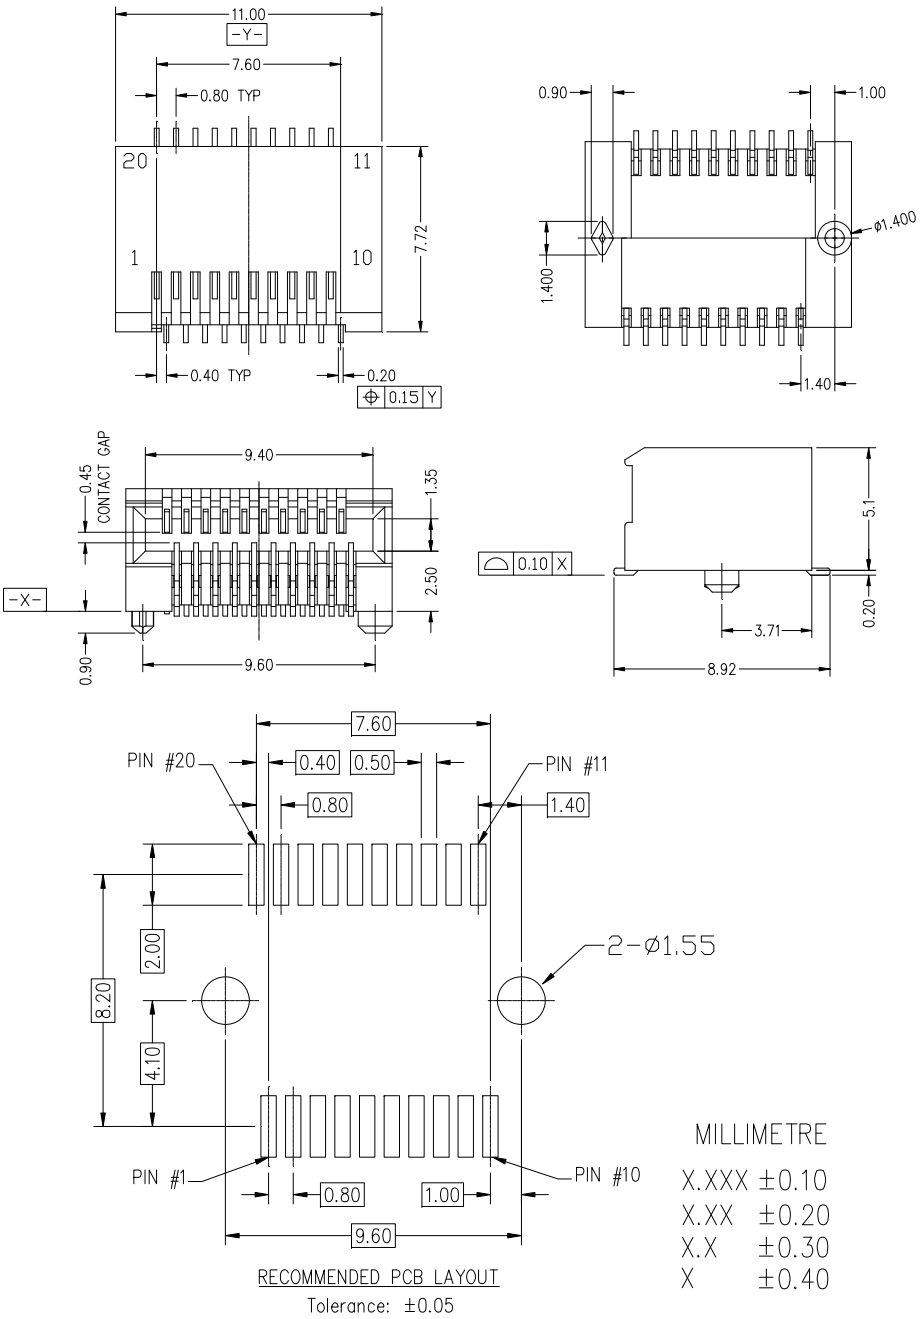

REV.	DESCRIPTION	DATE	DWN	AP'PD

SPECIFICATIONS:

Material:
 Insulator: LCP, UL 94V-0,
 Color: Black
 Contacts: Phosphor Bronze

Plating:
 M428-PS08RG
 Contact area: 30u" gold plating
 Solder tails: 3u" gold flash over 50 u" nickel plate.
 M42F-PS08RG
 Contact area: 15" gold plating
 Solder tails: 3u" gold flash over 50 u" nickel plate.

Electrical:
 Voltage Rating: 120 VAC max.
 Current rating: 0.5 Amp.
 Contact resistance: 35 milliohms max.
 Insulation resistance: 500 Mohms min.
 Dielectric withstanding voltage: 300 VAC/minimum.

Environmental:
 Operating temperature: -55° to +85°

	元册科技股份有限公司 YUAN DEAN SCIENTIFIC CO., LTD.			
	SFP+ CONNECTOR 0.80MM CENTER 20 POSITIONS			
	TITLE			
	P/N	YDS428-PS08RG	REV.	1.0
	PAGE NO	1-1	DATE	2015-4-20
AP'PD	Hsu	DWN	Chen Chuan Yu	